

Little York Lake Watershed Implementation Plan

Town of Preble, Cortland County, New York

Prepared for:

Cortland-Onondaga Federation of Kettle Lake Associations
 Attn: Ms. Tarki Heath
 1900 Rittenhouse Square
 Tully, New York 13159

Prepared by:

Princeton Hydro, LLC

203 Exton Commons
 Exton, Pennsylvania 19341
 (P) 610.524.4220
 (F) 610.524.9434

www.princetonhydro.com

*Offices in New Jersey, Pennsylvania, Maryland
 and Connecticut*



December 2017

*Funding: This report was funded by the National
 Fish and Wildlife Foundation Chesapeake Bay
 Technical Grants Program for Stormwater Management*

Contents

1.0 INTRODUCTION.....	3
2.0 LAKE AND WATERSHED CHARACTERISTICS.....	4
3.0 WATER QUALITY MONITORING.....	5
3.1 Introduction and Methodology	5
3.2 Results	5
4.0 POLLUTANT LOADING BUDGET	11
4.1 Introduction	11
4.2 Methodology	12
<i>Watershed Loading</i>	12
<i>Septic</i>	12
<i>Atmospheric Deposition</i>	13
<i>Internal Loading Assessment</i>	13
<i>Concentrated Animal Feedlot Operations</i>	13
<i>Macrophyte Harvesting – Nutrient Removal</i>	14
4.3 Results	15
5.0 WATERSHED DISTURBANCE AND BEST MANAGEMENT PRACTICES	18
Site 1: Route 11 Stormwater Ditch – Erosion	20
Site 2: Stream through Agricultural and Residential Area.....	23
Site 3: Stream through Agricultural Area	24
Site 4: Colonial Herb Garden	27
Site 5: Lakeside Lot – Northwest Shoreline	29
Site 6: East Shore – Residential / Agricultural Stormwater	31
Site 7: Dwyer Memorial Park Area – Little Park Road Pavilion	34
Site 8: Dwyer Memorial Park Area – Gravel Boat Launch Area.....	37
Site 9: Dwyer Memorial Park Area – Gravel Boat Launch Area.....	39
Site 10: Dwyer Memorial Park Area – Parking Area	40
Septic Management	41
Lawn Fertilizers	41
Deicers.....	42
6.0 IN-LAKE PHOSPHORUS MANAGEMENT	43
Aeration.....	43
Nutrient Inactivation	44
Floating Wetland Islands.....	44
Boat Motor / Sediment suspension	45
Harvesting	45
7.0 SUMMARY	46
8.0 REFERENCES	47
APPENDIX I	48

Primary Author
Michael Hartshorne

QA/QC Officer
Fred Lubnow, PhD


1.0 Introduction

Little York Lake, located in the town of Preble, Cortland County, New York, is part of a kettle lake system. Historically, this lake has suffered from symptoms of eutrophication such as elevated phosphorus concentrations, lack of oxygen (anoxia), algal blooms and dense aquatic vegetation. Furthermore, this lake has suffered from invasions of aquatic invasive species including zebra mussel (*Dreissena polymorpha*) and Eurasian watermilfoil (*Myriophyllum spicatum*). As part of this project, Princeton Hydro, in concert with the Cortland-Onondaga Federation of Kettle Lake Associations (C-OFKLA), Cortland County Soil and Water Conservation District and the Syracuse University Environmental Finance Center, has prepared small-scale Watershed Implementation Plans for Little York Lake, Tully Lake, Song Lake and Crooked Lake. Each plan is comprised of several inter-related components aimed to characterize the water quality of the lake, assess the external and internal phosphorus load, characterize the land use of the watershed and areas where best management practices (BMPs) may be implemented, and to correlate reductions in nutrient loading from each BMP into the nutrient budget for each lake. This plan is considered ‘small-scale’ given that only a single water quality sampling event was conducted and only ½ day was available to survey the watershed for areas which may benefit from BMPs. As such, this plan does not constitute an extensive lake and watershed management plan. Ultimately, this document may be utilized to seek funding sources to implement the projects contained herein and may be utilized in a larger context for lake management.

2.0 Lake and Watershed Characteristics

Little York Lake is a 41 ha (101 ac) kettle lake located in Cortland county, New York. The lake has a mean depth of 3.5 m (11.5 ft) and a deep maximum depth of approximately 23 m (75 ft) located in the northern basin of the lake. The shape of Little York lake is irregular leading to a shoreline of 3.4 km (2.1 mi) resulting in a shoreline development index (SDI) of 1.44. The shoreline development index is a unitless figure which relates the length of shoreline to the circumference of a perfectly circular lake of the same area. Many kettle and volcanic cirque lakes have smaller indices while larger index values are associated with the potential for higher development pressure and nutrient loading to a lake. For comparison, the SDI of Song and Tully Lakes are 1.46 and 2.66, respectively. The watershed of Little York Lake (Appendix I, Figure 1) encompasses 7,809 ha (19,296 ac) resulting in a watershed to lake ratio of 191:1. This ratio is, by far, the highest of the four kettle lakes investigated for this project. For comparison, the watershed ratios of Song, Tully and Crooked lakes are 9:1, 29:1 and 14:1, respectively. Typically, watershed to lake ratio values greater than 6 are indicative of a lake which is susceptible to higher levels of nutrient and sediment loading from the watershed.

Watershed land use categories are displayed graphically in Appendix I, Figure 2 and broken down by category in figure 2.1.

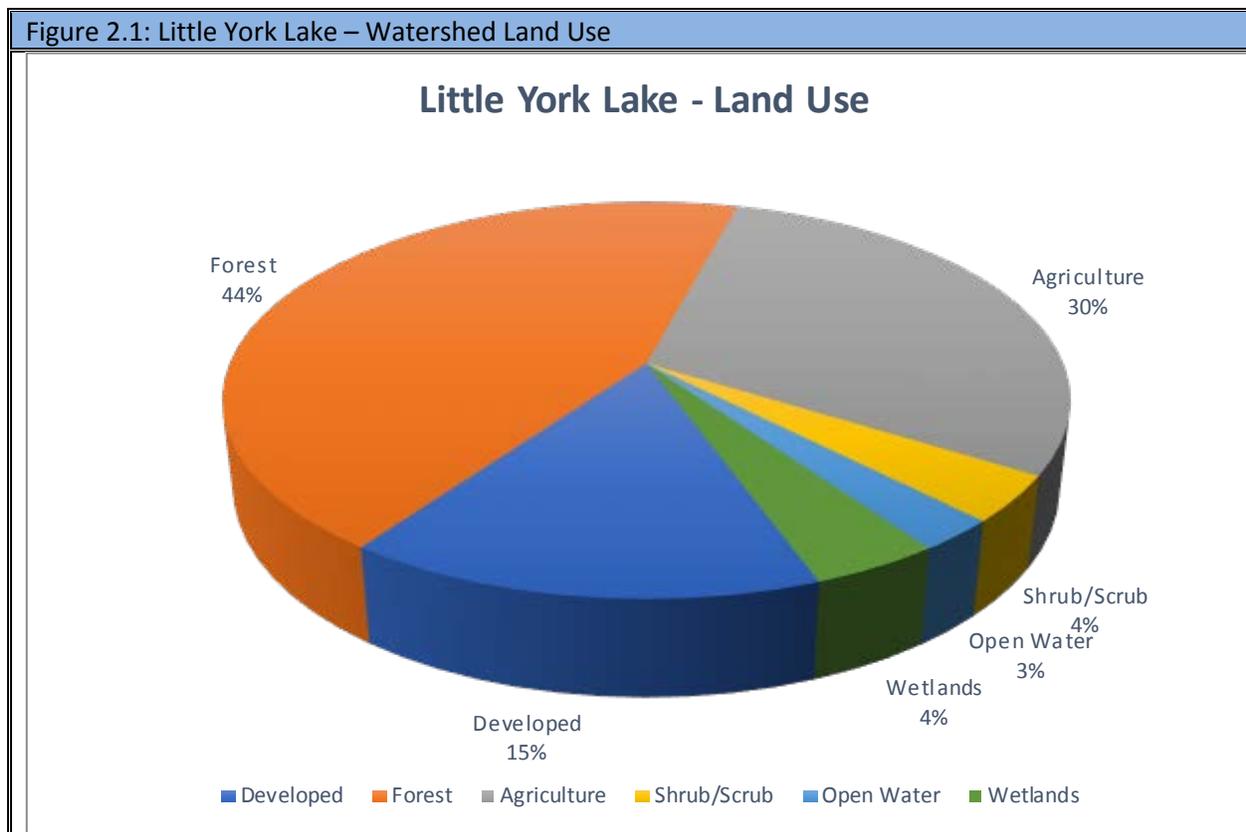

Forest represents the dominant land use in the watershed with a coverage of 3,459 ha (8,548 ac) located predominantly the northern, western and eastern ridges. Agriculture represents the second most prevalent land use category, comprising 2,321 ha (5,736 ac) of the watershed while developed lands comprise the third most prevalent land use category, comprising 1,204 ha (2,975 ac).

The inflow of Little York lake is derived from the west branch of the Tioughnioga River and groundwater. Outflow from Little York Lake continues the west branch of the Tioughnioga River for approximately eight (8) miles before it joins with the east branch to form the Tioughnioga River which subsequently flows into the Susquehanna River. The hydrology of Little York Lake is drastically different than that of Song and Crooked Lakes and different in scale to that of Tully Lake given the large watershed and resultant riverine influence. This hydrologic input, combined with the unique shape and depths of Little York Lake, likely impact phosphorus retention and cycling in a different manner than that of the aforementioned lakes.

3.0 Water Quality Monitoring

3.1 Introduction and Methodology

Princeton Hydro conducted limited water quality monitoring of Little York Lake to characterize the extent of thermal stratification, dissolved oxygen depletion and internal loading of phosphorus. This monitoring was conducted during a single event on July 12, 2017. During this event, Princeton Hydro established a monitoring station at a deep portion of the lake. Maximum depth was recorded and water transparency was measured with a Secchi disc. *In-situ* data collection consisted of measuring temperature, specific conductance, dissolved oxygen, dissolved oxygen percent saturation and pH, at 1 m intervals, throughout the water column. All *in-situ* measures were made utilizing a calibrated Hach MS5 water quality meter tethered to a Hydrolab surveyor. Discrete samples were also collected approximately 0.5 m below the surface and 1 m above the sediments for the analysis of total phosphorus (TP) and soluble reactive phosphorus (SRP). Upon collection, samples were placed on ice to 4°C and forwarded under chain-of-custody procedures to Environmental Compliance Monitoring of Hillsborough, NJ for analysis. Finally, assessment of the plankton (phytoplankton and zooplankton) was conducted through the deployment of a plankton tow net throughout the water column. Upon collection, this sample was preserved with Lugol's solution and analyzed for relative abundance and community composition by Princeton Hydro. The results of this single sampling event are presented below.

3.2 Results

Little York Lake was thermally stratified at the time of sampling with temperatures ranging from 4.79°C at 22 m to 23.86°C at the surface ($Z_{\max} = 22.5$ m). The epilimnion of Little York Lake was in the upper 2 m of the water column while the thermocline extended from 3 m to approximately 10 m. The hypolimnion extended from 10 m to lake bottom. Dissolved oxygen concentrations ranged from zero at 22 m to 10.72 mg/L (127.2%) in the surface. Anoxic conditions were recorded from 19 m to the lake bottom while hypoxic conditions were measured between 15 m and 18 m. pH values were variable throughout the water column ranging from 7.25 at 21 m to 8.27 in the surface. A positive heterograde was measured at approximately 4-5 m noted by an increase in dissolved oxygen at this depth. Transparency was excellent at the time of sampling with a Secchi disc measure of 3.6 m.

Discrete measures for phosphorus metrics in the surface waters of Little York Lake resulted in TP concentrations of 0.01 mg/L and SRP concentrations of 0.003 mg/L. TP concentrations in the deep waters of Little York Lake were non-detectable ($ND < 0.01$ mg/L) while SRP concentrations were 0.004 mg/L. These low concentrations were surprising given the extent of thermal stratification and anoxia measured at the time of sampling. Historical TP concentrations, as measured during CSLAP monitoring, exhibit similar patterns of low phosphorus with deep water concentrations not showing excessive variation from

surface concentrations. The exception to this was on 16 July 2015 and 26 August 2015 when deep water concentrations were markedly higher than those measured in the surface (figure 3.2). Lower than expected hypolimnetic TP concentrations may be related to several variables including flushing from the West Branch Tioughnioga River and the phosphorus, iron, sulfur and calcium content of the lake sediments. Further analysis of internal loading from Little York Lake, through sediment core release experiments or similar.

The phytoplankton community at Little York Lake was comprised of relatively low densities of cyanobacteria, chlorophytes, diatoms, chrysophytes and dinoflagellates. Co-dominance in the community was exerted between the dinoflagellate *Ceratium* and the chrysophyte *Chrysphaerella* with both listed as 'common.' The zooplankton community was dominated by the copepod *Cyclops* with lower densities of copepod nauplii and various cladocerans and rotifers.

The plankton community at the beach station showed relatively low algal densities with the community dominated by the diatoms *Fragilaria* and *Synedra*. No cyanobacteria were identified at the beach at the time of sampling. The only zooplankter identified at the beach was the copepod *Cyclops*.

Table 3.1: Little York Lake – *In-situ* Data

Kettle Lakes <i>in-situ</i> 7/12/17								
Station	Max	Secchi	Depth	Temp	SpC	DO	DO %	pH
	(m)	(m)	(m)	(C)	(mS/cm)	mg/L	(%)	(units)
Little York	22.5	3.6	0.1	23.86	0.498	10.72	127.2	8.27
			1.0	23.85	0.498	10.71	127.2	8.26
			2.0	22.44	0.505	8.88	102.6	7.98
			3.0	20.28	0.517	7.91	87.6	7.82
			4.0	16.53	0.514	10.03	103.0	8.04
			5.0	12.78	0.486	10.16	96.2	8.04
			6.0	10.26	0.489	7.67	68.6	7.70
			7.0	8.36	0.503	5.63	48.1	7.50
			8.0	6.98	0.522	4.12	34.1	7.42
			9.0	6.18	0.532	3.43	27.7	7.36
			10.0	5.74	0.537	3.24	25.9	7.35
			11.0	5.45	0.541	2.87	22.8	7.34
			12.0	5.34	0.541	2.63	20.8	7.35
			13.0	5.17	0.544	2.38	18.7	7.34
			14.0	5.07	0.545	2.24	17.6	7.33
			15.0	5.00	0.546	1.56	12.2	7.32
			16.0	4.96	0.547	1.24	9.7	7.31
			17.0	4.94	0.547	1.15	9.0	7.31
			18.0	4.89	0.547	1.21	9.5	7.31
			19.0	4.83	0.549	0.44	3.5	7.26
20.0	4.80	0.549	0.00	0.0	7.27			
21.0	4.79	0.549	0.00	0.0	7.25			
22.0	4.79	0.549	0.00	0.0	7.28			

Figure 3.1: Little York Lake – Temperature and Dissolved Oxygen Profile

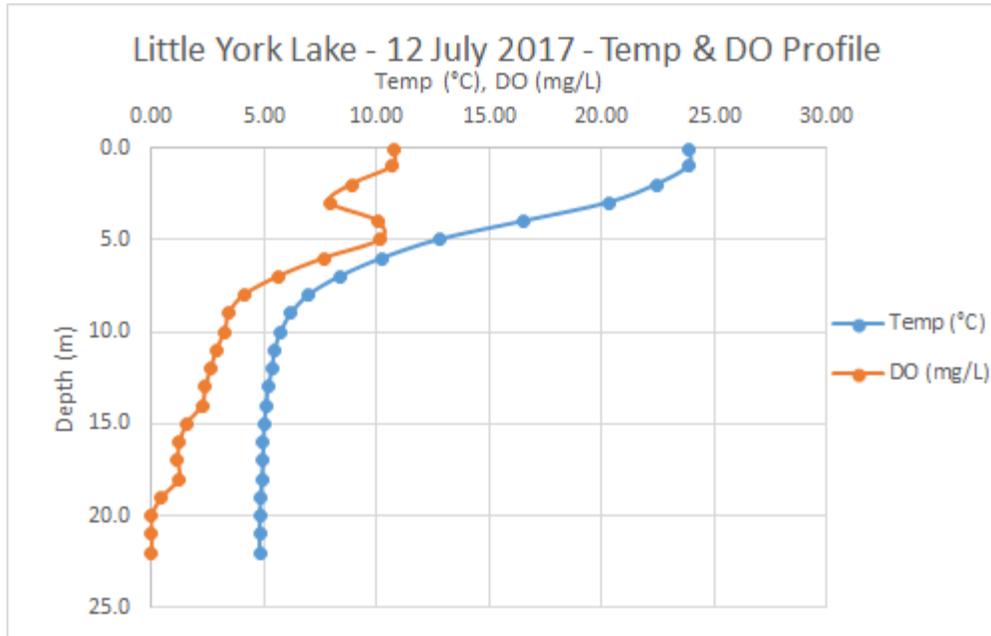


Figure 3.2: Little York Lake – Historical TP (CSLAP Data)

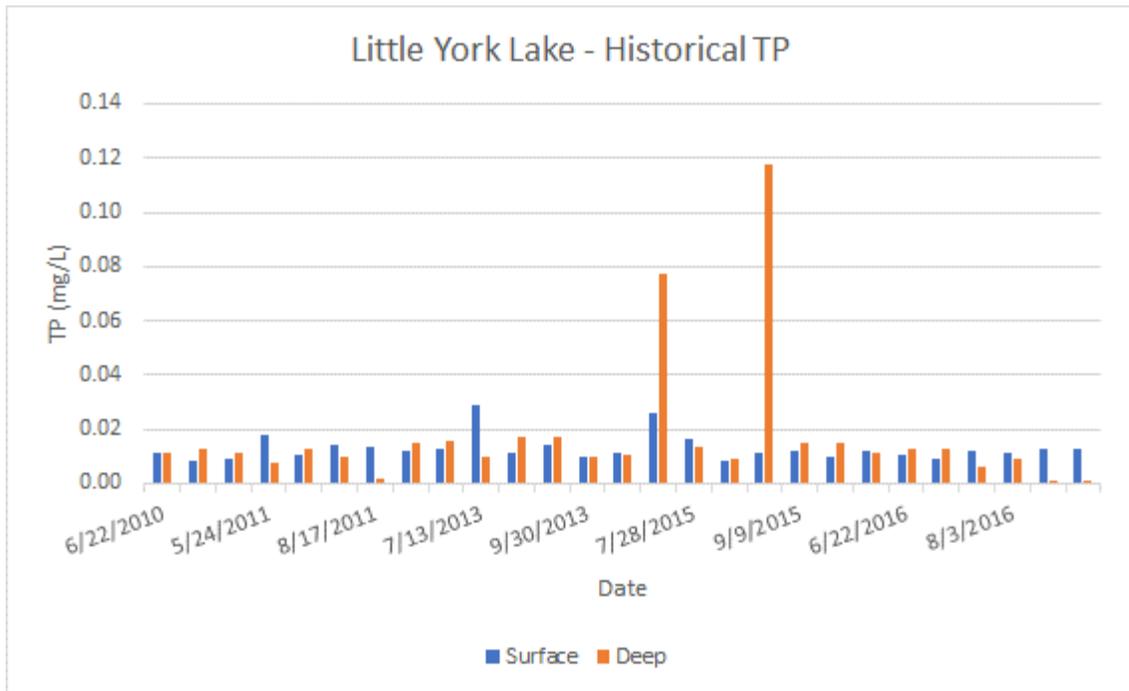


Table 3.2: Little York Lake – Plankton Data

Phytoplankton and Zooplankton Community Composition Analysis								
Sampling Location: Kettle Lakes			Sampling Date: 7/12/2017			Examination Date: 7/17/2017		
Site 1: Little York Lake Deep			Site 2: Little York Lake Beach					
Phytoplankton								
Bacillariophyta (Diatoms)			Chlorophyta (Green Algae)			Cyanophyta (Blue-Green Algae)		
	1	2		1	2		1	2
<i>Asterionella</i>	R		<i>Sphaerocystis</i>	R		<i>Anabaena</i>	R	
<i>Fragilaria</i>	P	C	<i>Pediastrum</i>	R		<i>Microcystis</i>	R	
<i>Tabellaria</i>	P	P	<i>Staurastrum</i>	R				
<i>Synedra</i>	P	C	<i>Mougeotia</i>		P			
Chrysophyta (Golden Algae)						Pyrrhophyta (Dinoflagellates)		
<i>Chrysosphaerella</i>	C					<i>Ceratium</i>	C	
<i>Dinobryon</i>	P							
Zooplankton								
Cladocera (Water Fleas)			Copecoda (Copepods)			Rotifera (Rotifers)		
	1	2		1	2		1	2
<i>Bosmina sp.</i>	P		<i>Cyclops sp.</i>	A	R	<i>Keratella</i>	P	
<i>Daphnia</i>	P		<i>D. Nauplius</i>	C		<i>Kellicottia</i>	P	
Sites:			Comments:					
Total Phytoplankton Genera	12	4						
Total Zooplankton Genera	6	1						
Sample Volume (mL)			Phytoplankton Key: Bloom (B), Abundant (A) Common (C), Present (P), and Rare (R)					
			Zooplankton Key: Dominant (D), Abundant (A), Present (P), and Rare (R); Herbivorous					

4.0 Pollutant Loading Budget

4.1 Introduction

In order to properly analyze the trophic state of Little York Lake and decide on appropriate watershed and in-lake management techniques a comprehensive nutrient budget must first be developed. In this sense all pollutant inputs must be identified and quantified in order to assess those areas which contribute a disproportional amount of that load and their relative influence on lake productivity. The pollutants of concern are total phosphorus (TP), total nitrogen (TN), and total suspended solids (TSS). Phosphorus and nitrogen are those two nutrients most critical to plant and algal growth and as such, increases in these nutrients generally lead to increased lake productivity. While both nutrients are modeled the nutrient of primary concern is phosphorus. In most temperate freshwater ecosystems this is the limiting nutrient, that is, the nutrient that is least available in relation to biological demand, and as such, small increases in phosphorus loading may result in exponential increases in algal and weed growth. There are several sources, both external and internal, of phosphorus loading to freshwater systems and each of these potential sources must be evaluated to develop a proper loading estimate. Total suspended solids represent the total amount of inorganic and organic particles within the water column and are the prime determinant of water clarity. High TSS concentrations may be associated with “muddy” water clarity and are generally the result of excessive sediment loading and suspensions of algal particles. Primary sources of sediment loading to the lake are generally derived through erosion of watershed soils and stream banks. Sediment loading generally results in the formation of sediment deltas and infilling of near shore areas thereby increasing aquatic weed habitat and providing the fertile substrate for benthic, filamentous algae. In addition, as phosphorus is often tightly bound to soil particles, increases in sediment loading are commonly correlated with increases in total phosphorus loading.

To address the issues of nutrient loading to trophic response Princeton Hydro conducted a comprehensive pollutant model which served to quantify both external and internal sources of nutrient loading. Those sources of nutrients which were quantified in this study include the following:

External

- Watershed as based on land use and land cover
- Atmospheric deposition
- Septic systems
- Point Sources
- Concentrated Animal Feedlot Operations (CAFO)

Internal

- Sediment phosphorus release under oxic and anoxic conditions

4.2 Methodology

Watershed Loading

Watershed based nutrient loading is often times the largest contributor of nutrients and sediments to the receiving waterbody. The watershed area and land uses in conjunction with the soils and slopes which comprise the watershed are all prime determinants of the magnitude of nutrient loading to a lake system. For the purpose of calculating the watershed based nutrient load Princeton Hydro utilized the Unit Areal Loading (UAL) approach. The UAL approach is the recommended pollutant modeling technique as per 40 CFR Part 35, Appendix A, the USEPA's "Guidance for Diagnostic-Feasibility Studies." This modeling approach is widely used by both USEPA and NYSDEC, and Princeton Hydro has applied it to compute the nutrient and sediment loads for well over 200 lakes and reservoirs located throughout the mid-Atlantic and New England states. The unit areal loading modeling approach is based on the premise that land use activities throughout a watershed have a direct impact on nutrient release and transport to a receiving waterbody. Essentially, those land uses which are disturbed (i.e. urban, commercial, and agricultural lands) serve to transport more pollutants to a receiving waterbody than those which are undisturbed (i.e. forest and wetlands). For the application of this model Princeton Hydro first utilized topography data provided by the New York State GIS Clearinghouse to delineate the watershed boundary of Little York Lake. Following this delineation land use / land cover data was clipped to this boundary. This data was subsequently reviewed for accuracy utilizing recent aerial photography and reclassified. This information was then utilized as the basis for the selection of pollutant export coefficients, in the units of (Kilogram of pollutant / Hectare / Year), which were most suitable for the watershed given prevailing soils, slopes, geology, and climatic conditions. Sources of export coefficients chosen for the Little York Lake watershed were derived primarily from the scientific literature which included but was not limited to those published by Reckhow, 1980 and Uttomark et al, 1974.

Septic

Septic systems serve as the primary method for treating wastes in the Little York Lake watershed. Even when the systems are fully operational in their primary function they may contribute phosphorus to the nearby lake. Loading may be attributable to many factors including poor siting as a result of low depth to bedrock, poor soil infiltration or high seasonal water table. In addition, many lakeside houses and septic systems that were originally designed for seasonal use transition into full-time residences and are not properly sized and maintained for this increase in use. For the determination of septic system loads to the lake Princeton Hydro first calculated the number of residences within the zone of influence of the lake or other waterways. For this study, the zone of influence represents those systems within 100 m (330 ft.) of the lake or other waterways per recommendations from the USEPA. Following this determination, Princeton Hydro utilized census data to determine the population served by these systems. Upon this determination, Princeton Hydro applied the phosphorus export coefficient of 0.165 kg/capita/yr to these systems. This export coefficient was developed by Princeton Hydro utilizing empirical septic leachate data on Greenwood Lake (NY/NJ). Nitrogen loading from septic systems was not modeled for this study.

Sediments and their bound nutrients may be precipitated as dryfall (dust) or through stripping during rainfall or snow events. While generally recognized as a small source of loading to many waterbodies atmospheric loading may play a critical role in large lakes or in those waterbodies with small watersheds.

This load was calculated using empirically derived loading coefficients (Schueler, 1992, Uttormark, et al. 1974, USEPA 1980 and Owe, et al. 1982) of phosphorus, nitrogen and sediment sources during dryfall and wetfall (rain / snow).

Internal Loading Assessment

A critical component in the development of this WIP was the assessment of the internal phosphorus load for Little York Lake. Kettle lakes in this region, formed by glacial retreat, are categorized by relatively deep depths and small watershed areas. These morphological characteristics, combined with eutrophication resultant from developed watersheds, may lead to deep water anoxia (no oxygen). When this occurs, phosphorus, which is typically chemically bound to iron in the lake sediments, becomes released to the overlying water whereby it becomes accessible to algae for growth.

Internal loading assessment for Little York Lake was determined through an evaluation of historical data collected through the CSLAP program including temperature and dissolved oxygen stratification patterns and surface and deep-water total phosphorus concentrations. This data was supplemented through sampling conducted by Princeton Hydro in July 2017. During a single event, Princeton Hydro collected *in-situ* temperature, specific conductance, pH and dissolved oxygen data in profile throughout the water column at the deepest portion of the lake. In addition, samples were collected for total phosphorus and soluble reactive phosphorus in the surface and deep waters of the lake. This data was utilized in concert with bathymetric data provided by the NYSDEC to determine the temporal and spatial extent of internal loading in Little York Lake. Finally, this information was utilized to help determine export coefficients from the scientific literature for internal phosphorus loading rates under oxic (with oxygen) and anoxic (no oxygen) conditions. The internal loading period was estimated at a total of 120 days per year, 45 of these days were under anoxic conditions while the remainder were under oxic loading. These rates were then applied to Little York Lake to determine the annual internal phosphorus load.

Concentrated Animal Feedlot Operations

A Concentrated Animal Feeding Operation (CAFO) is an animal feeding operation (farm) that meets certain animal size thresholds and that also confines animals for 45 days or more in any 12-month period in an area that does not produce vegetation. New York State has more than 500 CAFOs, the majority of which are dairy farms with 300 or more cows and associated livestock operations (NYSDEC, 2017). Animal feeding operations may produce significant nutrient loads through the feeding and defecation of farm animals which may be subsequently transferred to streams or groundwater sources. To effectively manage nutrient loading from feedlot operations, NYSDEC has implemented general permits for these facilities. As part of these regulations, each CAFO implements conservation practices for nutrient management to minimize non-point source pollution of nitrogen and phosphorus.

The computation of nutrient loading from CAFO operations is an inherently difficult process. Daily feeding, grazing, waste handling and spreading, spatial proximity to waterways, climate and a myriad of other site-specific factors regulate nutrient loading from any one facility. For this study, Princeton Hydro aimed to compute a general load of nitrogen and phosphorus from each facility. This load may be utilized as a general estimate but does not include site-specific conservation or nutrient mitigation processes that may be implemented at each property.

For the computation of nutrient loading from CAFOs, Princeton Hydro first identified the location of CAFOs in the watershed through data provided by NYSDEC Division of Water. This database provided the location of each CAFO and animal population data. Three CAFOs were identified in the Little York Lake watershed. One of these operations was entirely located within the watershed boundary while the other two were on the watershed boundary. For the determination of the loads from each CAFO Princeton Hydro first determined the number of animals in each CAFO and converted these to animal equivalent units (AEUs). For those CAFOs only located partially within the watershed boundary, Princeton Hydro area weighted the animal population data. Following this determination, pollutant loading coefficients for nitrogen and phosphorus, derived from the *Mapshed* modeling program, were applied to determine the annual pollutant load. The loading coefficient for nitrogen was 0.44 kg N/AEU/day while that for phosphorus was 0.07 kg P/AEU/day (Evans, 2014). For the computation of the load which is available for export from the site to the watershed, Princeton Hydro applied a loss rate. For this study, Princeton Hydro assumed that 5% of the annual nutrient load is available for transport to the watershed. This loss rate is lower than the 20% assumed utilizing the *Mapshed* program. Finally, the majority of animal operations likely spread manure at various fields, some of which may not even be in the watershed, as such, the estimates contained herein should be utilized with the aforementioned points in consideration.

Macrophyte Harvesting – Nutrient Removal

The final component in assessing the nutrient budget for Little York Lake was the integration of macrophyte harvesting. This management measure is utilized primarily to control nuisance levels of aquatic vegetation but has the added benefit of removing those nutrients contained within plant biomass from the lake thereby serving as an in-lake bmp. For this study, Princeton Hydro received estimated mass removed per year from the Cortland County Soil and Water Conservation District. This value was estimated to range between 100 to 250 tons per year, wet weight. Princeton Hydro utilized the low estimate (100 tons/year) in conjunction with a phosphorus value of 2,216 mg/kg of P to compute the mass of phosphorus removed from the lake on an annual basis. The plant phosphorus concentration data was obtained from Princeton Hydro's in-house database on macrophyte phosphorus concentrations derived from work conducted on Lake Hopatcong in New Jersey.


4.3 Results

Summary results for nutrient loading to the lake are presented in table 4.1.

Table 4.1: Little York Lake Pollutant Loading Summary							
Little York Lake - Nutrient Loading Summary							
	Watershed	Septic	Internal	Atmospheric	CAFO	Harvesting	Sum
TN (kg/yr)	75,636	N/A	N/A	409	26,440	N/A	102,484
TP (kg/yr)	3,994	57	48	10	4,206	-201	8,114
TSS (kg/yr)	4,928,000	N/A	N/A	286	N/A	N/A	4,928,286
*Direct							
**includes septic, internal, atmospheric and point from tully / song with lake retention factored in							

On an annual basis, 102,484 kg (225,939 lbs) of nitrogen, 8,114kg (17,888 lbs) of phosphorus and 4,928,286 kg (10,865,011 lbs) of sediments are transported to Little York lake. A breakdown of the sources of phosphorus to Little York Lake are hereby presented in figures 4.1 and 4.2.


Figure 4.1: Little York Lake TP Loading Summary

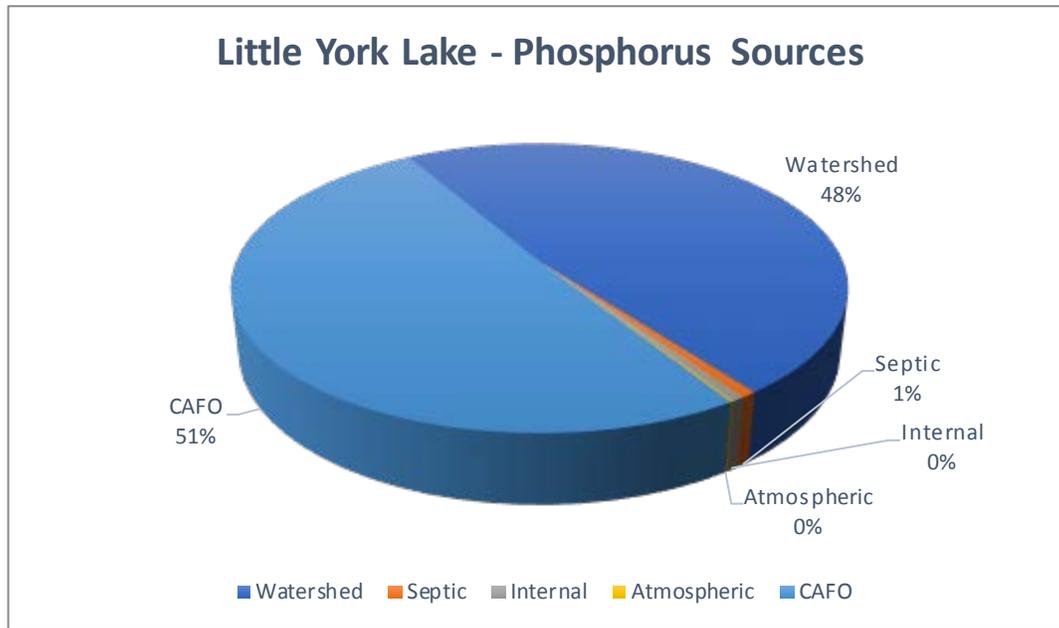

The primary source of phosphorus loading to Little York Lake is derived from concentrated animal feeding operations with 51% of the annual load. The second greatest source is derived from direct watershed loading which comprises 48% of the load. The remaining loading sources (Septic, internal and atmospheric) are all 1% or less of the annual load. The small percentage of these loading sources is due to the large watershed of Little York Lake and types of activities which occur in the watershed.

Given the magnitude of the CAFO load it will be necessary to place focus on these facilities. Each facility should already have a nutrient management plan in place that will need to be adhered to diligently to prevent watershed pollution. A breakdown of the watershed based load, excluding CAFO loading, is presented in figure 4.2. Agriculture represents the primary land derived phosphorus source with cultivated crops and pasture / hay contributing 61% of the watershed based load. Developed land is the second greatest source with 19% of the load while forested land contributes 18% of the watershed based load. Please note, open water and wetlands are also present in the watershed and represent phosphorus attenuation of 132.7 kg/TP/yr.

Figure 4.2: Little York Lake – Watershed TP Loading

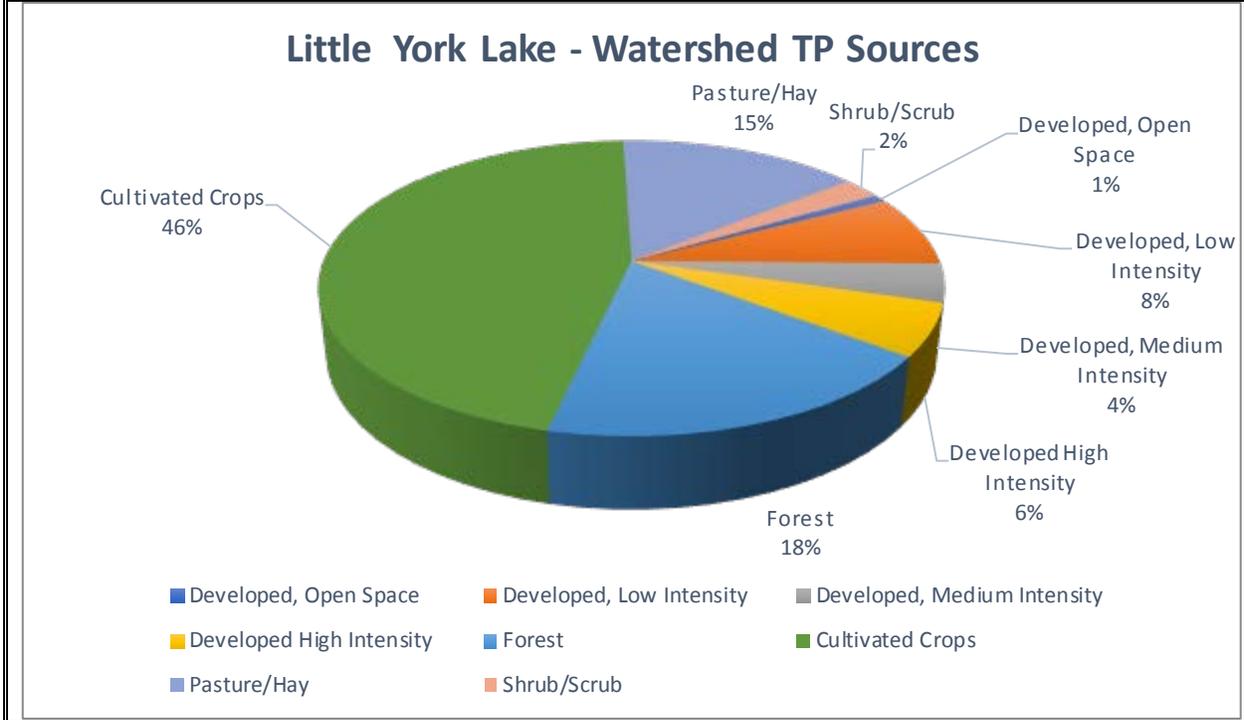

Watershed based BMPs will need to focus on phosphorus derived from both agriculture and developed land use for the successful reductions in nutrient loading to the lake. The following section will detail the results of a watershed walk conducted by Princeton Hydro in May 2017. Please note, this section is not an exhaustive survey of the watershed. Specifically, many areas, such as agricultural lands, that are on private land or are otherwise inaccessible are excluded from this report but will very likely need managed to reach nutrient reduction goals. This section will provide examples of watershed issues which could benefit from better management and provide information on approximate costs, nutrient reduction and maintenance opportunities for each section.

5.0 Watershed Disturbance and Best Management Practices

In anthropogenically altered watersheds, land use practices have been changed in ways that consequently alter the hydrologic cycle and increase pollutant loading to a lake. For this document, the term ‘pollutant,’ refers primarily to phosphorus, nitrogen and sediment but may also include salts, heavy metals or pesticides. Some of these pollutants are contributed directly to a lake, but, more commonly, these pollutants are derived from diffuse ‘non-point sources.’ Non-point source pollution is a term which relates to the contribution of sediments, phosphorus and nitrogen to waterways through land and stream bank erosion, stormwater and septic.

The watersheds of the Kettle Lakes were historically dominated by forest and wetland. With development came the clearing of forests and modification of wetlands, either through infilling, draining or flow alteration. The current land use of the Little York Lake watershed is comprised of a mixture of these forests and wetlands but also the human dominated land uses of residential housing, agriculture and transportation infrastructure. The anthropogenic land use changes reduced vegetative cover, exposed soils, increased impervious areas and introduced pollutants through fertilizers, road salts and byproducts of human materials. These changes ultimately lead to a marked change in the hydrology of the watershed in such a way that infiltration and groundwater recharge was likely reduced while the volume and rate of stormwater based surface discharge increased. Ultimately, this change in stormwater leads to stream channel downcutting, widening and bank instability leading to instream erosion. This geomorphic change results in a disconnect between streams and their floodplains and results in increased sediment and nutrient loading to lakes.

To mitigate non-point source pollution, we look to implement watershed best management practices. Watershed best management practices focus on structures, retrofits and even behaviors that may help reduce pollution to a waterway. Princeton Hydro focuses primarily on the selection and utilization of best management practices which fit in with Green Infrastructure. Green Infrastructure is a water management approach that seeks to mimic the natural environment and associated natural processes. These processes include sedimentation, filtration / flow resistance, bio-uptake, recharge, decomposition and bioretainment. Many of the structures or techniques listed below aim to utilize soils and vegetation to mimic these processes found in nature. In doing so, these techniques may serve to not only reduce nutrients to a lake but also serve as habitat for aquatic and terrestrial organisms in an ever increasing fragmented landscape.

The following section details the results of a watershed walk conducted over a half-day in May 2017 by Princeton Hydro and various stakeholders including members of Syracuse University, C-OFOKLA, local residents and members of Cortland County Soil and Water Conservation District. This walk aimed to photo-document areas of non-point source pollution which may benefit from the inclusion of best management practices. This summary is not an exhaustive survey of watershed conditions or BMP recommendations but provides specific examples of areas that can be improved. Furthermore, prior to the implementation of any BMP there will likely be additional, site specific, information needed such as: Utility, topographic and/or transportation surveys, stormwater engineering calculations, property ownership assessment, geologic or soil assessments, local, state and/or federal permits, etc.

Recommendation of BMP types are included along with rough estimates for costs and pollutant removal. Costs are based on similar projects conducted by Princeton Hydro but are very site specific upon a myriad of factors. Pollutant removal was computed based on removal estimates provided by various BMP

manuals including those issued by the States of New York and Pennsylvania. A summary of the types of maintenance associated with each BMP is also listed. Finally, recommendations on the priority of each BMP are listed as ‘low’, ‘medium’, and ‘high.’ These priorities are based on several factors including overall cost, ease of installation, permitting requirements, the need for cooperation from various government entities and pollutant removal. In general, those projects which may be easily implemented with minimal permitting and cost while providing ecological and pollutant removal benefits are rated as ‘High.’ This is particularly the case for those sites which occur on public property. Sites of high cost, extensive permitting or those on private property may be more difficult to implement and are therefore given a lower rating.

A summary of recommended BMPs is presented first (table 5.1) followed by a breakdown of each site. A figure showing the location of each recommended BMP is provided in Appendix I.

Site	BMP	Estimated Cost (\$)	Pollutants Removed (kg/yr)			Priority
			TSS	TP	TN	
1	Step – Pool Conveyance	\$50,000 - \$100,000	2,590	2.6	65	High
2	Riparian Buffer (600 ft.) / Floodplain bench	Riparian Buffer - \$1,750 / acre, Floodplain - \$50,000	720	1.2	5.4	High
3	Riparian Buffer (9,500 ft.)	\$1,750 / ac	11,400	19	86	High
4	Rain Garden	\$2,000 - \$5,000	14	0.01	0.06	Medium
5	Lakeshore Buffer	\$10,000 - \$20,000	400	0.3	1	Medium
6	Catch Basin Insert Filter	\$1,000 - \$2,000	210	0.13	0.5	High
7	Bioswale	\$15,000 - \$20,000	28	0.02	0.12	High
8	Bioswale	\$10,000 - \$15,000	28	0.02	0.12	Medium
9	Bioswale	\$10,000 - \$15,000	55	0.04	0.24	Low
10	Bioswale / Bioinfiltration trench	\$75,000 - \$125,000	83	0.06	0.36	Medium

Site 1: Route 11 Stormwater Ditch – Erosion

Site Location and Description: *N42.75204° W76.12100°* – Roadside stormwater ditch

Issues: Stormwater conveyance through dirt ditch leading to erosion.

BMP Recommendation: Encourage vegetative growth in ditch. Utilize check dams where necessary to slow flow or convert to step-pool conveyance system.

Cost: Variable based on site specific conditions. Engineering, permitting and construction. Estimate \$50,000 – \$100,000

Maintenance: Monitor vegetation and remove invasives. Check for silt build up and remove.

Pollutant Removal: TSS 2,590 kg/yr, TP 2.6 kg/yr, TN 65 kg/yr

Priority: High


Additional Locations: *N42.69832° W76.16334° & N42.70510° W76.15742° (Route 281)*

Examples of the recommended BMPs are provided below.

Figure 5.1: Route 11 Stormwater Ditch




Figure 5.2: Step-Pool Conveyance Engineering Diagram

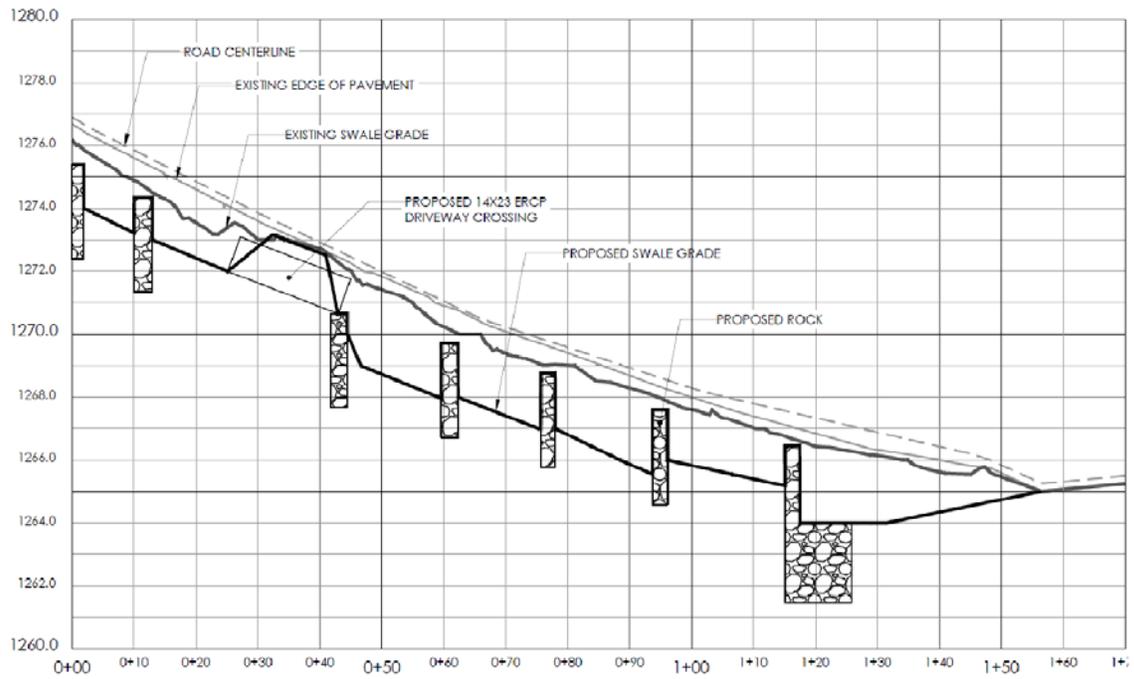

Source: Princeton Hydro – Harvey’s Lake Step Pool Conveyance / Infiltration

Figure 5.3: Regenerative Step-Pool Conveyance – Before and After

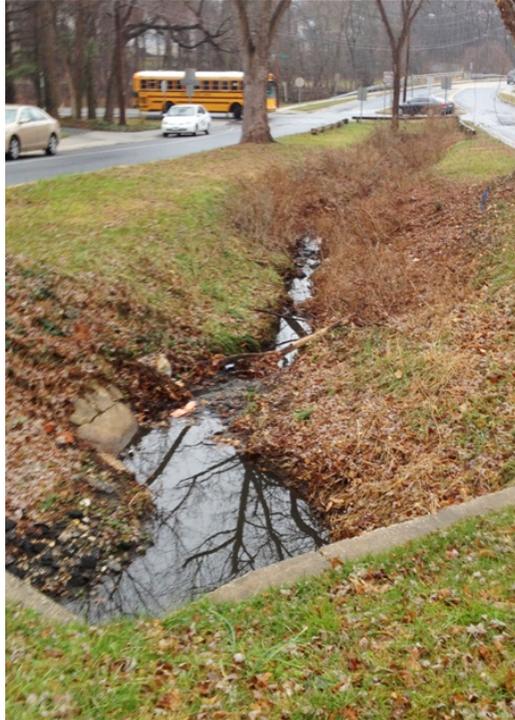

Source: Maryland DEP – Mary Travaglini, Planning Specialist

Site 2: Stream through Agricultural and Residential Area

Site Location and Description: $N42.73680^{\circ}$ $W76.12472^{\circ}$ – Stream through agricultural and residential land including road crossing.

Issues: Lack of riparian buffer. Stream erosion due to disconnect from floodplain. Possibly undersized culvert

BMP Recommendation: Install 600 linear feet of riparian buffer along stream – Ideally the riparian buffer should be 200' in width with a minimum width of 50-100'. Conduct geomorphic analysis and install floodplain bench to reconnect stream to floodplain.

Cost: *Riparian buffer* - approximately \$1,750 per acre for plants, materials and labor. *Floodplain Bench* - \$50,000 not including engineering and permitting.

Maintenance: Monitor vegetation for invasive species or die off. Remove invasives and replant natives that have died.

Pollutant Removal: *Riparian Corridor (500 linear feet)* TSS 720 kg/yr, TP 1.2 kg/yr, TN 5.4 kg/yr.

Priority: High

Additional Locations: Southern portion of the West Branch Tioughnioga River

Figure 5.4: Stream Through Residential and Agricultural Field



Site 3: Stream through Agricultural Area

Site Location and Description: N 42.726611°, W 76.131325° - West Branch Tioughnioga River through agricultural land

Issues: Lack of riparian buffer between stream and agricultural land and route 11.

BMP Recommendation: Approximately 9,500 linear feet of shoreline is without proper riparian buffer. Install riparian buffer along stream – Ideally the riparian buffer should be 200’ in width with a minimum width of 50-100’.

Cost: *Riparian buffer* - approximately \$1,750 per acre for plants, materials and labor.

Maintenance: Monitor vegetation for invasive species or die off. Remove invasives and replant natives that have died.

Pollutant Removal: *Riparian Corridor (9,500 linear feet)* TSS 11,400 kg/yr, TP 19 kg/yr, TN 86 kg/yr

Priority: High

Examples of the recommended BMPs for Sites 2 & 3 are provided below.

Figure 5.5: Stream Through Residential and Agricultural Field



Figure 5.6: Riparian Buffer Infographic



Source: PACD.org

Figure 5.7: Riparian Buffer Example



Source: Mr. Josue Cruz

Site 4: Colonial Herb Garden

Site Location and Description: N42.71275°
W76.14859° - Colonial Herb Garden

Issues: Opportunity for rain garden demonstration project

BMP Recommendation: Establish rain garden and educational signage

Cost: Approximately \$2,000 - \$5,000 depending on need for soil amendment.

Maintenance: Check and remove any invasive species annually. Monitor functionality in terms of infiltration

Pollutant Removal: TSS 14 kg/yr, TP 0.01 kg/yr, TN 0.06 kg/yr


Priority: Medium

Examples of the recommended BMPs are provided below.

Figure 5.8: Colonial Herb Garden



Figure 5.9: Raingarden Example

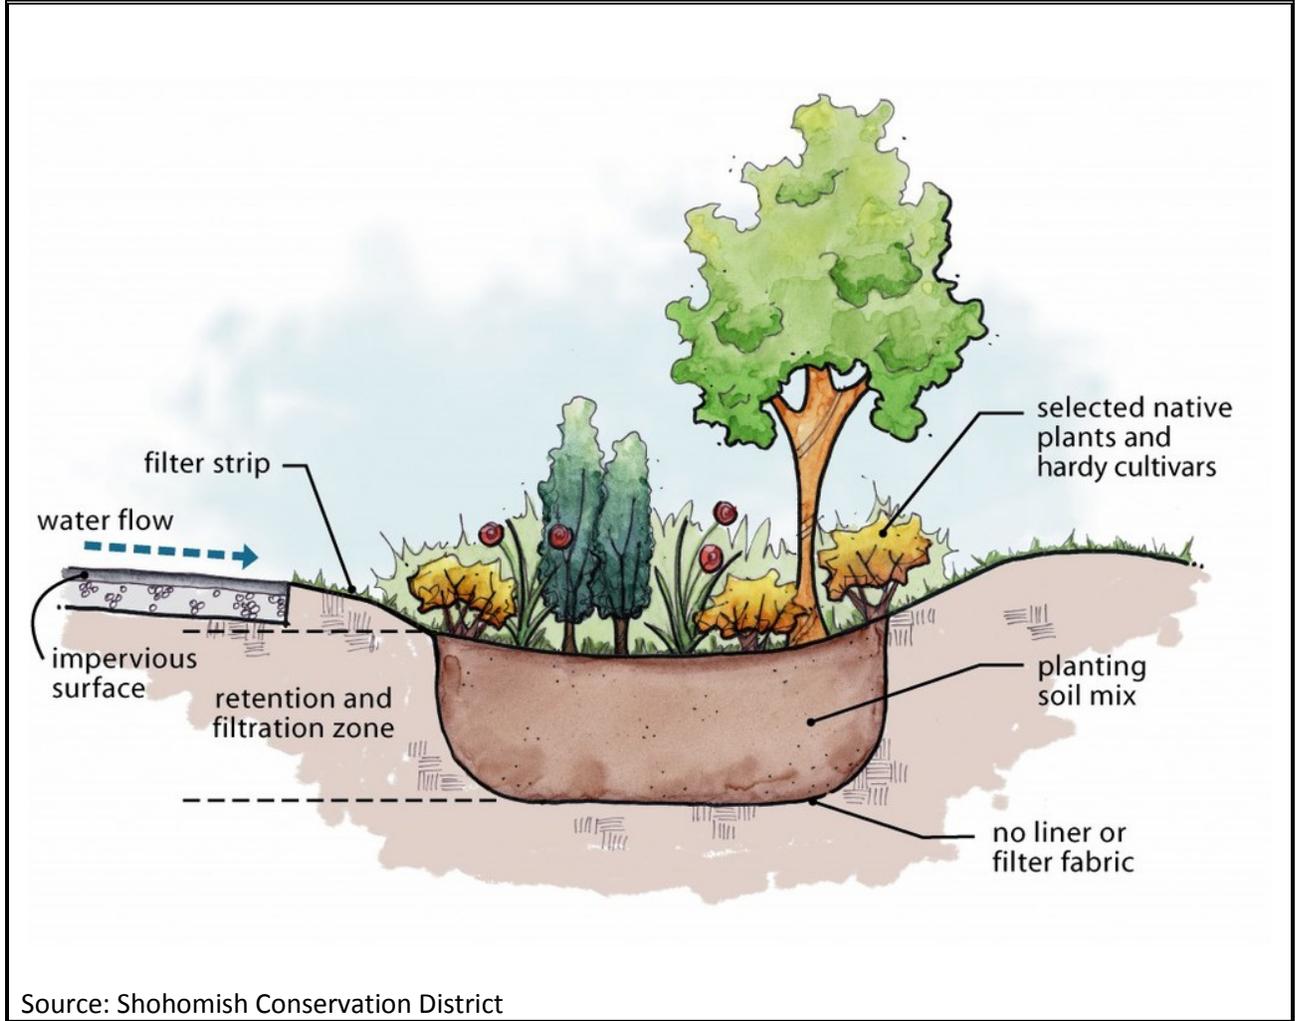

Site 5: Lakeside Lot – Northwest Shoreline

Site Location and Description: *N42.71426° W76.14907° – Turf grass shoreline*

Issues: No lakeshore buffer

BMP Recommendation: Establish lakeshore buffer and meadow / pollinator garden. May need to utilize coir fiber logs for erosion control. Utilize low and medium height native vegetation to maintain viewscape. Offers pollutant filtering and critical near-shore habitat.

Cost: Estimated cost approximately \$10,000 - \$20,000

Maintenance: Check and remove any invasive species annually.

Pollutant Removal: TSS 400 kg/yr, TP 0.3 kg/yr, TN 1 kg/yr

Priority: Medium


Additional Locations: *Majority of lakefront lots exhibit turf grass to water edge and can benefit from shoreline restoration.*

Examples of the recommended BMPs are provided below.

Figure 5.10: South shore of Little York Lake



Figure 5.11: Example of Lakeshore Buffer Conversion

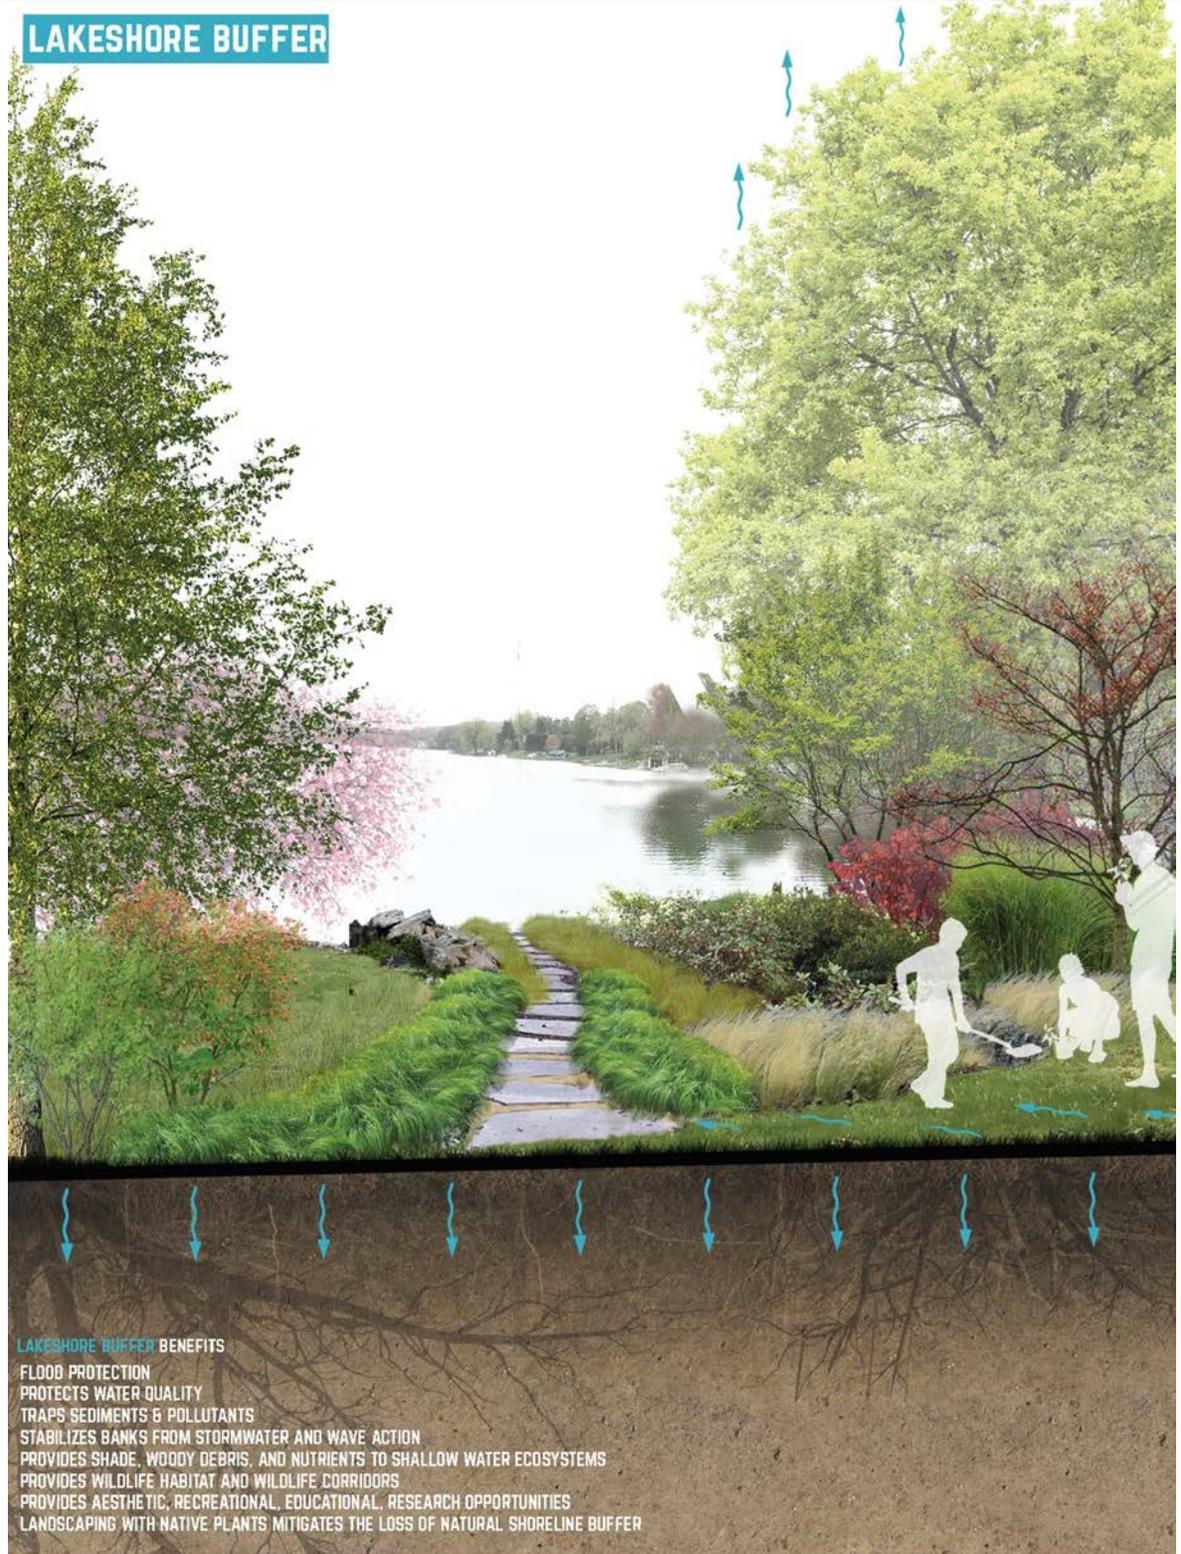

Source: Mr. Josue Cruz

Site 6: East Shore – Residential / Agricultural Stormwater

Site Location and Description: *N42.70057° W76.15711°*– Agriculture / Residential land adjacent to lake and stormwater catch basin

Issues: Erosion and stormwater leading to sediment transport through catch basin

BMP Recommendation: Create vegetated or similar buffer at depressions which capture stormwater. Utilize catch basin retrofit, such as Aqua-Guardian to capture sediments and nutrients

Cost: Vegetation or erosion barrier at agricultural area stormwater catch basin - \$200. Aqua-Guardian or similar – Approximately \$1,500 - \$2,000 each

Maintenance: Check and remove sediment from catch basin with vacuum truck or similar routinely.

Pollutant Removal: *Residential insert* – TSS 210 kg/yr, TP 0.13 kg/yr, TN 0.5 kg/yr

Priority: High

Additional Location: *Catch basin inserts can also be utilized at N42.70061° W76.15502° (E. Spur Road) & N42.70908° W76.15480° (Little York Lake Road)*

Examples of the recommended BMPs are provided below.

Figure 5.12: South shore of Little York Lake

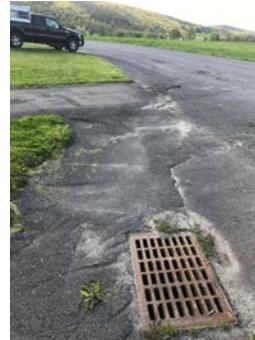


Figure 5.13: Example of Catch Basin Insert

AquaShield

AQUA-GUARDIAN™


CATCH BASIN INSERT

- 1 Surface runoff from paved areas such as parking lots, streets, and bridges enter the storm drain
- 2 Contaminated water enters the Aqua-Guardian™ catch basin via curb inlet or surface grate
- 3 The Aqua-Guardian™ is constructed of HDPE & stainless steel for easy installation
- 4 Standpipe filter screens floating debris while filter media targets fine sediment and free oil
- 5 Proven point source protection for sensitive receiving waters

INNOVATING GOOD CLEAN WATER

Source: Aquashieldinc.com

Figure 5.14: Example of Inlet Protection

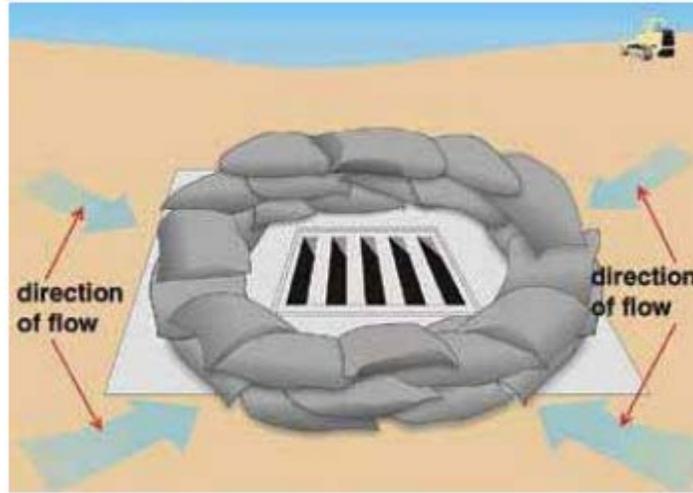

Source: Stormwater.pca.state.mn.us

Site 7: Dwyer Memorial Park Area – Little Park Road Pavilion

Site Location and Description: *N42.71283° W76.15000°* - Gravel parking lot and swale near basketball courts

Issues: Erosion from gravel parking lot

BMP Recommendation: Stabilize parking lot gullies and direct stormwater to rehabilitated bioswale.

Cost: Estimated cost materials and implementation is approximately \$15,000 - \$20,000 which does not include engineering or permitting.

Maintenance: Check and remove any invasive species annually.

Pollutant Removal: TSS 28 kg/yr, TP 0.02 kg/yr, TN 0.12 kg/yr

Priority: High

Examples of the recommended BMPs are provided below.

Figure 5.15: Parking Lot and Swale



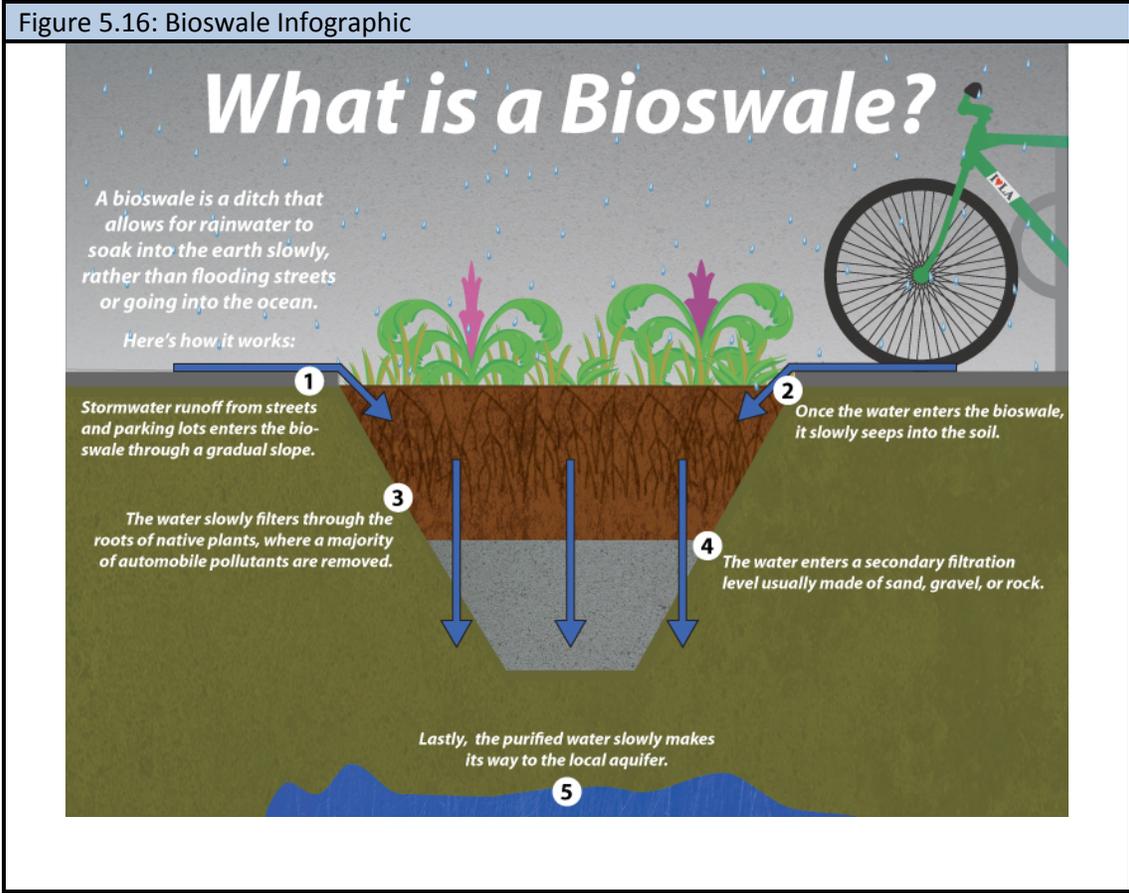


Figure 5.17: Bioswale Site Illustration



Source: Mr. Josue Cruz

Site 8: Dwyer Memorial Park Area – Gravel Boat Launch Area

Site Location and Description: *N42.71283° W76.15000°* - Gravel parking lot / launch and turf grass hillside

Issues: Turf hillside to gravel parking lot – runoff. Use this area to implement bioswale. Additional signage and washdown station for aquatic invasive species.

BMP Recommendation: Stabilize parking lot gullies and direct stormwater to rehabilitated bioswale to intercept and treat runoff from turf hillside – Use this project as educational piece for visitors. Increase signage for aquatic invasive species – provide washdown station.

Cost: *Bioswale* - \$10,000 - \$15,000. *Washdown Station and Signage* - \$20,000

Maintenance: Check bioswale routinely for functionality (i.e. presence of ponding), sediment accumulation and invasive species. Check functionality of washdown station and check / remove discarded AIS

Pollutant Removal: *Bioswale* – TSS 28 kg/yr, TP 0.02 kg/yr, TN 0.12 kg/yr

Priority (Bioswale): Medium

Examples of the recommended BMPs are provided below.

Figure 5.18: Parking Lot and Swale



Figure 5.19: AIS Cleaning Station Example



**Site 9: Dwyer Memorial Park Area –
Gravel Boat Launch Area**

Site Location and Description: *N42.70943°
W76.15060°* - Large turf grass area

Issues: Turf hillside and field leading to ponding water at roadside.

BMP Recommendation: Ample space for implementation of bioswales

Cost: *Bioswale* - \$10,000 - \$15,000 not including engineering or permitting

Maintenance: Check bioswale routinely for functionality (i.e. presence of ponding), sediment accumulation and invasive species.

Pollutant Removal: TSS 55 kg/yr, TP 0.04 kg/yr, TN 0.24 kg/yr

Priority: Low

Figure 5.20: Turf field and gravel road



Site 10: Dwyer Memorial Park Area – Parking Area

Site Location and Description: *N42.70943° W76.15060°* - Large impervious parking area

Issues: Extensive impervious area limiting infiltration and promoting sheetflow

BMP Recommendation: Divert runoff from parking lot to bioswale / bioinfiltration trench

Cost: *\$75,000 - \$125,000* not including engineering or permitting

Maintenance: Check bioswale / trench routinely for functionality (i.e. presence of ponding), sediment accumulation and invasive species.

Pollutant Removal: *Variable dependent on system & drainage area – low estimate - TSS 83 kg/yr, TP 0.06 kg/yr, TN 0.36 kg/yr*

Priority: Medium

Figure 5.21: Turf field and gravel road



Septic Management

Much of the residential land surrounding Little York Lake utilizes septic systems for treatment of human wastes. The soils, slopes and water table surrounding the lake make on-site wastewater treatment a critical issue for the health of the lake relative to phosphorus loading. Review of the Septic Tank Absorption Field ratings derived from the National Resources Conservation Service show the soils surrounding the lake to range from 'somewhat limited' to 'very limited' in their ability to adequately treat wastes. The estimated total phosphorus load derived from septic systems is 1% of the total load. While a small percentage, the proximity of the systems to the lake impart a higher importance on septic maintenance.

At a minimum, septic tanks should be pumped out every three years. Maintaining this pumpout schedule may reduce phosphorus loading from this source by 20 - 30% (Day, 2001). In addition, water conservation measures should be implemented at each residence. Lowering the burden on the septic system will allow for reduced nutrient transport to shallow groundwater, and ultimately, Little York Lake.

Incentivizing the maintenance of septic systems through providing monetary benefits for completing pumpout or maintenance, or through providing reduced costs for these services, has been implemented successfully locally through the Song Lake Property Owners Association. Similar programs should be implemented on a municipal level to encourage all residents to keep their systems up to date and in good working order.

Finally, the type and age of septic systems may play a significant role in their functionality and contribution of nutrients to the watershed. This study merely looked at the presence of such systems without conducting a detailed assessment of whether systems need upgraded or replaced. Princeton Hydro recommends implementing such a study with backing by the local municipality and C-OFOKLA.

Lawn Fertilizers

Lawn fertilizers are often an acute source of nutrient pollution to lakes. Often, these products are applied in spring or fall and are quickly washed away during precipitation events directly into the lake where they fuel algal blooms. Currently, New York bans phosphorus fertilizers under ECL § 17-2101 et seq. This law, applicable to all persons, states the use of phosphorus fertilizers on lawns or non-agricultural turf is restricted. Only fertilizers with less than 0.67 %/w phosphate may be applied legally. Furthermore, applications between December 1 and April 1 are prohibited. An application buffer of 20 feet from a waterway or paved surface was also implemented as part of this rule.

Prior to application of any fertilizers, homeowners should have their soil tested by the local agricultural district or similar entity. This testing will provide empirical data on the amount of nutrients in the soil and need for any additional nutrients. Often times, phosphorus is present in abundance in soils and does not need additional application. Many times, the pH of the soil needs adjusted with lime thereby raising pH to a level where the phosphorus that is present in the soil becomes biologically available for turf grass. If fertilizers are needed, homeowners should look for and use phosphorus free fertilizers. Fertilizers are typically labeled with three values (N-P-K) representing the proportion of nitrogen – phosphorus – potassium in the product. As such, look for fertilizers with a middle number of zero (e.g. 24-0-12) or a bag with 'lake friendly' on the front.

Educational campaigns about the 2012 State rule banning phosphorus fertilizer should be conducted routinely for watershed residents.

Deicers

There is considerable concern in the kettle lakes region of the impact of salts on the water quality of the lakes. Road salts (chloride) are commonly applied not only to driveways but also on state roads and interstate 81. The latter of which is likely a major source of chloride pollution during the winter months. The major issue with the application of road salts is that chloride is a conservative ion that is not readily sorbed onto mineral sources or involved in many significant biochemical reactions. As such, this ion persists in soils and ground and surface water. Ultimately, increases in chloride levels follow increases in watershed development and impervious area. These increases may alter the composition of the lake food web through changes in the invertebrate, plankton and fishery structures.

Management of road salts is a complex subject due to the human safety aspect. When possible, those who apply road salts should look into alternative deicers such as calcium magnesium acetate. Additives, such as natural beet sugars, lower the temperature of brine used to pretreat roads and has been documented in reducing overall salt use. Furthermore, where possible, setbacks should be established so that deicing compounds are not applied near surface water sources.

6.0 In-lake Phosphorus Management

In Little York Lake, 1% of the annual phosphorus load is estimated to be derived from internal sediment release. This load is extremely small relative to other sources but may provide an acute source of nutrients during the peak of the growing season. While watershed management should be the primary focus for Little York Lake, the following provides options for controlling internal loading.

There are several ways to manage internal loading of phosphorus in lake systems. These techniques focus on the maintenance of oxygen in the hypolimnion of the lake or the 'sealing' of lake sediments through the application of chemical flocculant or inactivation products. In addition, floating wetland islands may be utilized to assimilate phosphorus from the epilimnion. While floating wetlands islands will not control internal loading they serve as a chemical free in-lake measure to reduce the overall phosphorus load in the lake.

Aeration

Aeration for internal phosphorus control focuses on the maintenance of dissolved oxygen in the hypolimnion thereby serving to keep the redox potential at such a level as to mitigate large scale internal release of phosphorus and metals. Aeration systems for lake management typically fall under the categories of systems which disrupt thermal stratification, such as submerged diffuser systems, or systems which keep stratification in place, such as hypolimnetic aeration systems. Typically, the latter is utilized when there is the desire to maintain cold-water fishery habitat while destratification systems are commonly utilized in relatively shallow lakes.

For Little York Lake, efforts should be placed primarily on controlling the external P load and continued study of the impacts of internal loading. Modeling has shown the internal load to be small overall and discrete data collected over several years showed, with the exception of some events, minor variation between surface and deep TP concentrations. As such, the expenditures of an aeration system do not seem warranted at this time.

Nutrient Inactivation

Nutrient inactivation in lakes occurs through the application of a chemical, typically an aluminum or lanthanum/clay based product. Typically, phosphorus is bound to iron in the sediments through a relatively weak molecular bond which is broken under anoxic conditions. In contrast, the bond between phosphorus and nutrient inactivation products is stronger and therefore is not broken, or is broken more slowly, under anoxic conditions.

The products commonly utilized in lake management for nutrient inactivation includes aluminum sulfate (alum) or alum surrogates such as polyaluminum chloride. More recently, the utilization of lanthanum modified bentonite clay based products, such as the proprietary Phoslock[®], have been utilized when there are concerns about alum toxicity or regulatory restraints on the use of such products. The latter is currently the case in New York State which has placed an indefinite moratorium on the utilization of alum for lake management purposes. While Phoslock is utilized with efficacy for phosphorus 'stripping' in lakes, where P is removed from the water column, the efficacy of control of sediment released P under anoxic conditions is relatively low while costs are much higher than aluminum based products. As such, this management measure is not currently recommended for Little York Lake.

Floating Wetland Islands

Floating wetland islands (FWIs) are a relatively new technique in lake management that uses biomimicry to assimilate and process nutrients that would otherwise stimulate algal growth. FWIs are structures composed of woven, recycled plastic material. Vegetation is planted directly in the plastic matrix of the islands with peat and then these structures are deployed in the lake. Once positioned, these units are anchored, typically with rope and cinder blocks. The vegetation grows on the FWIs with their roots growing down through the plastic matrix into the lake. The combination of the root structure and plastic matrix relates to a very high surface area which subsequently serves as habitat for bacteria and biofilm. It is estimated that one 250 ft² island has a surface area equal to approximately one acre of natural wetland. Once installed, the FWI serves as a nutrient sink whereby the plants and microbial community associated with the root mass and plastic matrix assimilate phosphorus. In turn, a portion of this phosphorus may be incorporated up the food chain and transported out of the lake system. Diverting this phosphorus reduces the amount of phosphorus which may be assimilated by harmful algae. Studies by Princeton Hydro have shown that one (1) 250 ft² island has the potential to sequester up to 10 lbs of phosphorus per year. Given that each pound of phosphorus has the potential to produce up to 1,100 lbs of algae per year, each island has the potential to mitigate 11,000 lbs of wet algae biomass annually.

Floating wetland islands are less costly than the measures mentioned above but do not directly address internal loading. Instead, they remove phosphorus from the epilimnion during the growing season. The cost for a single 250 ft² island, including plants and installation, is roughly \$10,000. Approximately five (5) islands would be recommended for Little York Lake to be placed in shallow areas that are known to receive storm inflow. These units would be installed in conjunction with a holistic watershed / in-lake management plan and as such are viewed as a piece of an overall management approach.

Significant study has been conducted on the impacts boat motors have on sediment suspension and the effects of this on reductions in water transparency and phosphorus mobilization. The degree of impact is generally related to motor size, water depth and sediment type (Buetow, 2000). There is some evidence that, depending on lake, boat motors may increase phosphorus loading which may lead to increases in algal growth. This is particularly the case in shallow areas comprised of fine, nutrient rich sediments. Impacts are less pronounced or absent in deep areas or areas of coarse sediments. Care should be taken to operate a motorized boat in a mindful manner in shallow areas and no-wake zones. Motor sizes and correlated mixing depths are as follows (Nedohin, 1996 & Yousef, 1978):

- 10 hp – 6 feet
- 28 hp – 10 feet
- 50 hp – 15 feet
- 100 hp – 18 feet

Princeton Hydro recommends abiding by the above guidelines. If necessary, local municipalities may consider adopting ordinances or similar to enforce safe, mindful boating practices.

Harvesting

Macrophyte harvesting is currently conducted on Tully Lake and Little York Lake. In addition to removing nuisance densities of aquatic plants, harvesting has the added benefit of removing the nutrients contained within the plant biomass. For example, Princeton Hydro quantified the phosphorus concentration in SAV at Lake Hopatcong in New Jersey. The mean P concentration in this wet SAV biomass was 2,216 mg/kg. Plant removal from Tully and Little York Lake was estimated at approximately 100 tons wet weight thereby resulting in a removal of approximately 200 kg of P per year. This removal accounts for approximately 2.4% of the annual P load to the lake. Princeton Hydro recommends the continuation of this management measure for maintenance of acceptable macrophyte densities and phosphorus removal.

7.0 Summary

Princeton Hydro, along with project partners, conducted a miniature watershed implementation plan for Little York Lake. This plan aimed to characterize the water quality and pollutant load to the lake and to identify areas in the watershed that may be contributing nutrients to the waterbody that could benefit from best management practices. Ultimately, this plan may be integrated into a full-scale watershed implementation plan or lake management plan to contribute towards the restoration of the lake. In addition, this plan may serve as a jump-off point for securing funding for the projects identified herein.


Phosphorus loading to Little York Lake was estimated to occur primarily between CAFOs and watershed sources, each of which accounted for close to half the annual P load. Internal loading, septic systems and atmospheric deposition were all a very minor component of the load. Constructive partnerships between local farmers, the conservation district(s) and C-OFOKLA should continue to be fostered to stress the importance of conservation and nutrient management. Watershed based BMPs, as highlight in section 5, may serve to reduce external P loading to the lake. Internal loading of P may be investigated further as there does appear to be instances of heightened loading under certain conditions.

Princeton Hydro recommends the adoption of this plan by the town of Preble. The successful implementation of this, and any, watershed plan is contingent on the cooperation of multiple stakeholders of varied interests. Finally, Princeton Hydro would like to thank the local residents, C-OFOKLA, Syracuse University and the Cortland County Soil and Water Conservation District for all of their input, help and support during this project.

8.0 References

- Day, L.D. 2001. Phosphorus Impacts from On-site Septic Systems to Surface Waters in the Cannonsville Reservoir Basin, New York. Delaware County Soil and Water Conservation District. Walton, New York
- Evans, B. 2014. Mapshed Version 1.1 Users Guide. Penn State Institutes of Energy and the Environment.
- Gold, A. 2006. Special Issue: Fate of Phosphorus in Septic Tanks (Autonomous Waste Water Treatment Systems). Scope Newsletter No. 63.
- Kappel, William et.al., 2011. Hydrogeology of the Tully Lakes Area in Southern Onondaga and Northern Cortland Counties, New York. United States Geologic Survey.
- Nedohin, David. 1996. The Effects of Motor Boats on Water Quality in Shallow Lakes. Toxicological and Environmental Chemistry, Vol. 61, pp. 127 – 133.
- New York State Department of Environmental Conservation. 2015. New York State Stormwater Management Design Manual. Albany, New York
- Pennsylvania Department of Environmental Protection. 2006. Pennsylvania Stormwater Best Management Practices Manual. Harrisburg, Pennsylvania.
- Princeton Hydro. 2011. On-Site Wastewater Treatment System Management Plan for the Township of West Milford. West Milford, New Jersey.
- Reckhow, K.H. 1979. Quantitative Techniques for the Assessment of Lake Quality. EPA-440/5-79-015. Washington, D.C.
- USEPA. 2001. 66 FR 2959 – National Pollutant Discharge Elimination System Permit Regulation and Effluent Limitations Guidelines and Standards for Concentrated Animal Feeding Operations.
- USEPA. 1987. Clean Lakes Program Guidance. Washington, D.C.
- Yousef, Y.A. 1979. Changes in Phosphorus Concentrations Due to Mixing by Motor Boats in Shallow Lakes. Water Research, 14 pp. 841-852
- Zehnder, C.M. 1997. Estimating Feedlot Nutrient Budgets and Managing Manure Output. Minnesota Cattle Feeder Report B-450.

Appendix I

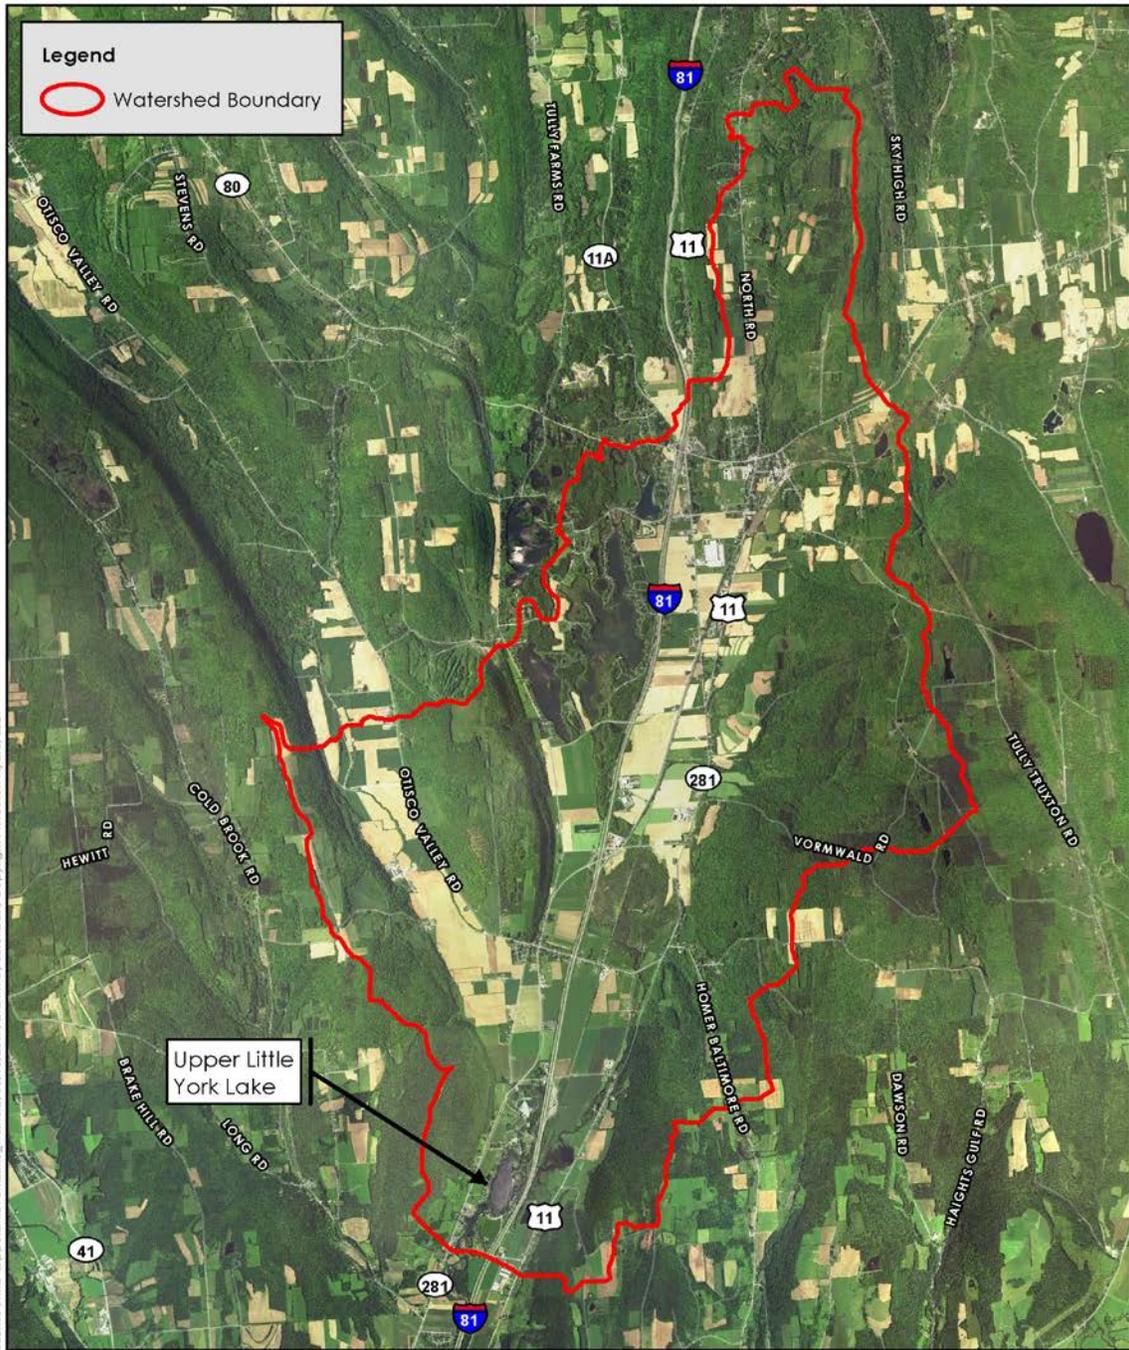


File: E:\GIS - Projects\Kerf\cortland\MD\UpperLittleYorkLake_M0.mxd - 10/16/2017. Drawn by: sabelboort. Copyright Princeton Hydro, LLC.

UPPER LITTLE YORK LAKE WATERSHED
 UPPER LITTLE YORK LAKE
 WATERSHED IMPLEMENTATION PLAN
 TOWNS OF HOMER & PREBLE
 ONONDAGA & CORTLAND COUNTIES, NEW YORK

PH PRINCETON HYDRO, LLC.
 1108 OLD YORK ROAD
 P.O. BOX 720
 RINGOES, NJ 08551
 *with offices in NJ, PA and CT

NOTES:
 1. 2015 Cortland county orthophotography obtained from the National
 Agriculture Imagery Program (NAIP).
 0 4,000 8,000 Feet
 Map Projection: NAD 1983 StatePlane New York, Central FIPS 3102 Feet

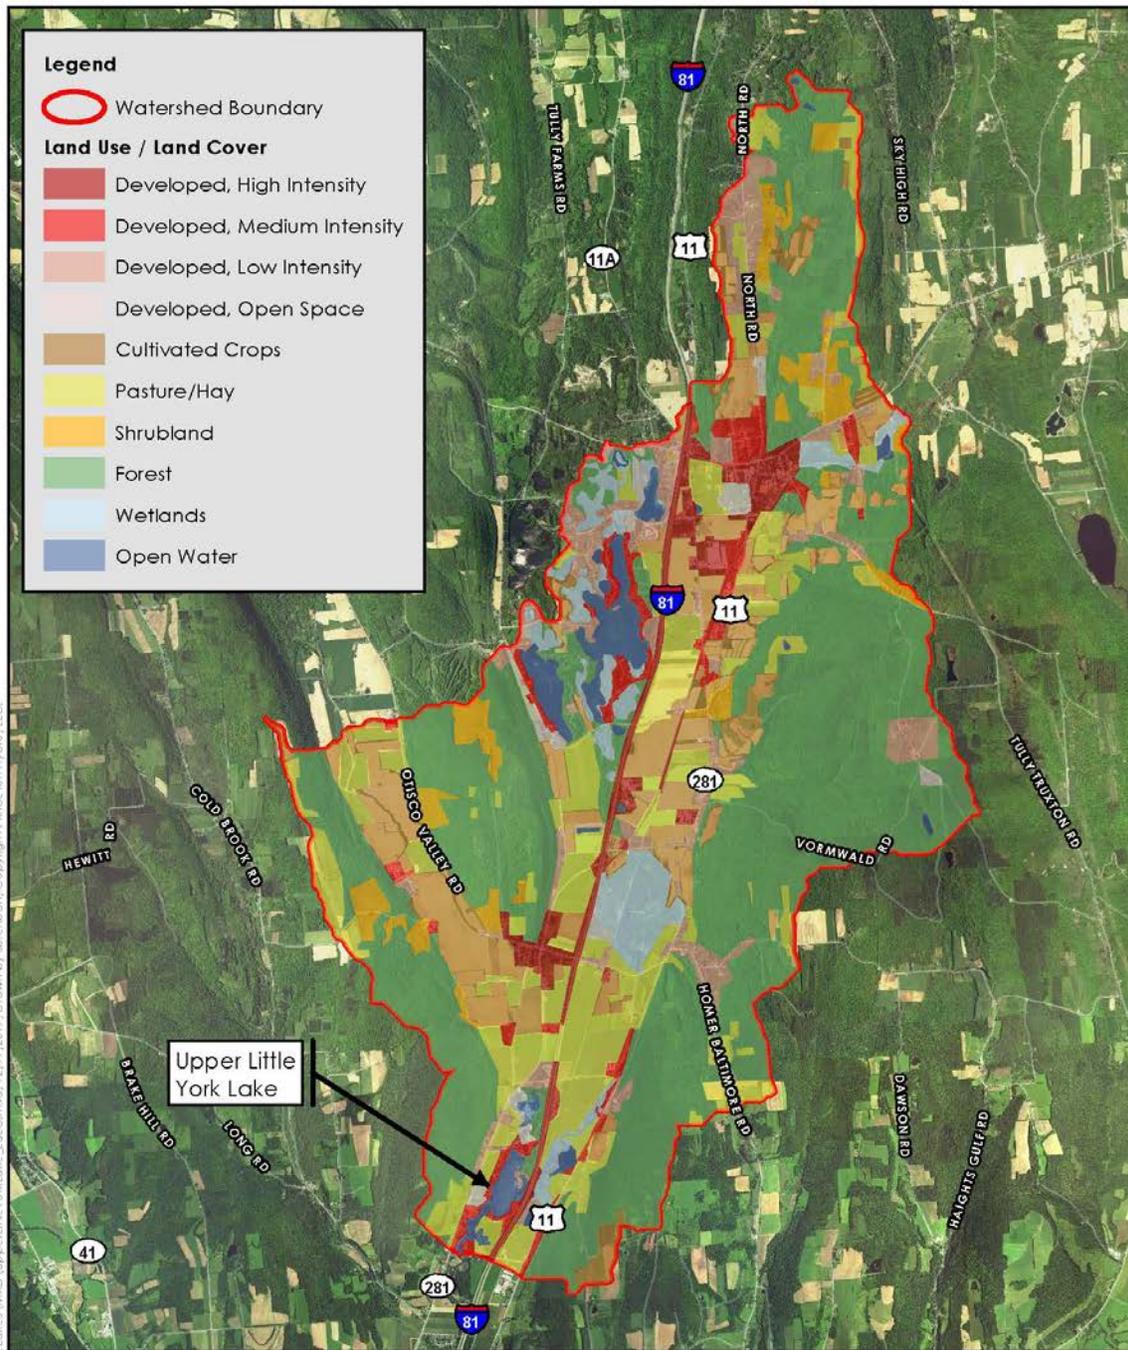

File: E:\GIS - Projects\Upper Little York Lake\LU_Cover.mxd, 12/11/2017, Drawn by: abelbert, Caspigh, Princeton Hydro, LLC

UPPER LITTLE YORK LAKE LAND USE

UPPER LITTLE YORK LAKE
 WATERSHED IMPLEMENTATION PLAN
 TOWNS OF HOMER & PREBLE
 ONONDAGA & CORTLAND COUNTIES, NEW YORK

PH PRINCETON HYDRO, LLC.
 1108 OLD YORK ROAD
 P.O. BOX 720
 RINGOES, NJ 08551
 *with offices in NJ, PA and CT

NOTES:
 1. 2015 Cortland county orthophotography obtained from the National Agriculture Imagery Program (NAIP).
 2. Hand-digitized land use/land cover is approximate.

0 4,000 8,000 Feet
 Map Projection: NAD 1983 StatePlane New York - Central FIPS 3102 Feet

